







**ELCB-5**

**EMI/RFI BAND IN A CAN ADAPTER**

**USED ON MIL-DTL-38999 SERIES III & IV**

**ELCB-5-AC-S-1504-S-L**

BASIC PART NUMBER \_\_\_\_\_  
 SERIES (For MIL-DTL-38999 ser. III&IV) \_\_\_\_\_  
 MATERIAL (see table 1) \_\_\_\_\_  
 FINISH (see table 2) \_\_\_\_\_  
 ANGLES (S=00°, A=45°, R=90°) \_\_\_\_\_  
 SHELL SIZE (see table 3) \_\_\_\_\_  
 ENTRY SIZE (see table 4) \_\_\_\_\_  
 BAND (S Standard Band, M Micro Band) \_\_\_\_\_  
 LENGTH - for straight only, (see table 5) \_\_\_\_\_

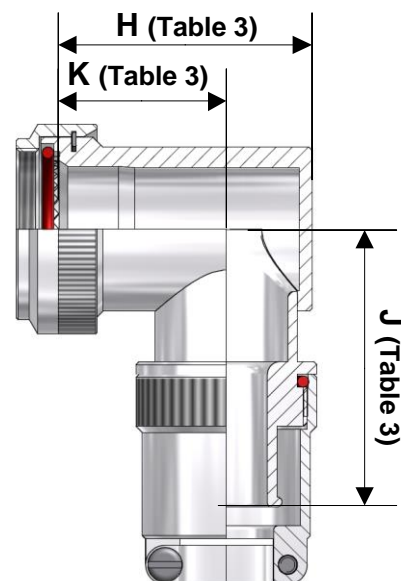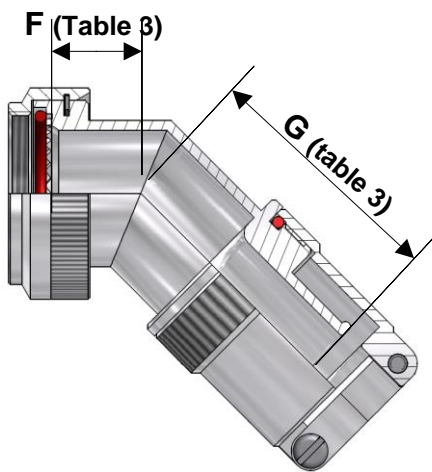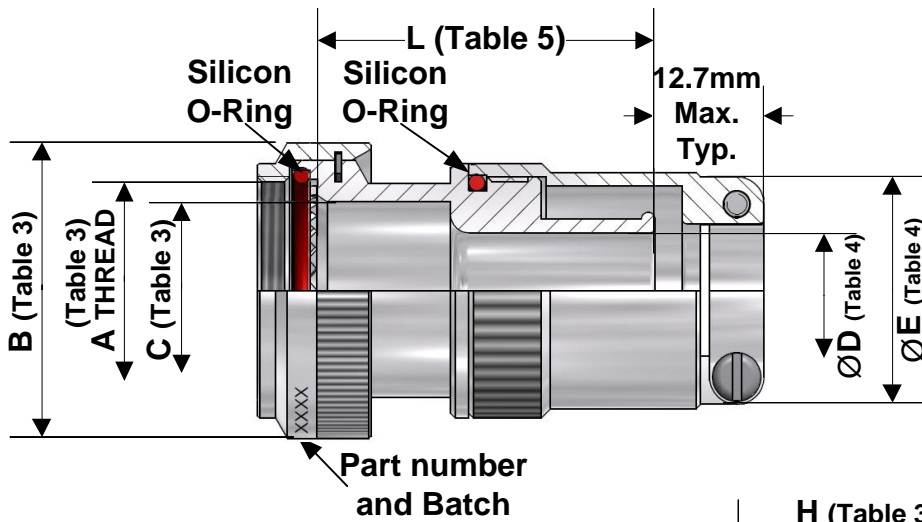



Material (Table 1)	
A	ALUMINIUM alloy as per ASTM B221/B85
B	NICKEL ALUMINIUM BRONZE
S	STAINLESS STEEL

FINISH (Table 2)	
C	CADMIUM OLIVE DRAB OVER, AMS-QQ-P-416 ,Type-II, Class-3. ELECTROLESS NICKEL, AMS-C-26074, Class-4 cgade-B
B	UNPLATED CLEAN FINISH NOT SHOT BLASTED (FOR NICKEL ALUMINIUM BRONZE)
E	ELECTROLESS NICKEL AMS-C-26074, Class-4 cgade-B
J	PASSIVATE PER QQ-P-35 (FOR STAINLESS STEEL)
Z	ZINC NICKEL ALLOY, DARK OLIVE DRAB PASSIVATE OVER ELECTROLESS NICKEL ASTMS 841-91.
ZB	ZINC NICKEL ALLOY, BLACK PASSIVATE OVER ELECTROLESS NICKEL ASTMS 841-91.

ENTRY SIZE (Table 4)		
Entry Size	ØD Min.	ØE Max.
01	6.35	18.8
02	7.92	20.4
03	9.53	22.0
04	12.70	25.0
05	15.88	28.3
06	19.05	31.5
07	22.23	34.7
08	25.40	37.8
09	28.58	41.0
10	31.75	44.2

LENGTH (Table 5)	
For Straight only	
"L"	LENGTH
2	25.4
3	38.1
4	50.8
5	63.5
6	76.2
7	88.9
8	101.6
9	114.3
10	127.0

SHELL SIZE (Table 3)										
Shell Size		A	B	C	F	G	H	J	K	Standard Entry size
Comercial	Military	Thread	Max.	Min.	Max.	Max.	Max.	Max.	±0.5	
A	09	M12 x 1.0	18.0	6.7	13.1	40.5	25.7	41.3	17.5	01
B	11	M15 x 1.0	21.0	10.2	13.9	41.9	26.7	43.0	17.5	02
C	13	M18 x 1.0	24.5	13.5	14.5	42.3	31.2	44.5	20.0	03
D	15	M22 x 1.0	29.0	16.2	15.5	43.2	37.2	46.1	24.5	04
E	17	M25 x 1.0	32.5	19.4	16.1	44.0	40.2	47.7	26.7	05
F	19	M28 x 1.0	35.5	21.8	16.8	44.1	44.7	48.4	27.0	06
G	21	M31 x 1.0	37.0	25.1	17.1	45.0	49.2	50.0	30.5	06
H	23	M34 x 1.0	40.0	28.2	17.7	45.5	51.7	51.6	31.5	08
J	25	M37 x 1.0	43.5	31.4	18.4	46.2	53.2	53.1	33.0	08

**Notes:**

1. THIS PRODUCT IS DESIGNED TO TERMINAING OVERALL HARNESS SHIELDS. THIS BACKSHELL UTILIZE STANDARD BAND RING FOR 360 DEGREES SHIELD TERMINATION AND LOWEST DC RESISTANCED, USE HEAT SHRINKABLE BOOT.
2. MATED PROVIDE A WATER-TIGHT SEAL MEETING THE REQUIREMENTS OF MIL-C-85049, PAR. 3.5.7.
3. BACKSHELL TO BE PERMANENTLY MARKED WITH CODE IDENTIFICATION NUMBER AND PART NUMBER. (e.g.12321-ELCB-1-AC-S-1504-S).
4. ALL DIMENSIONS ARE IN MM.